




POWER ARM  
**30 SERIES**

PA3430 - 3.4m (11' 2") reach  
PA3530 Skid Steer / Utility Loader Series - 3.7m (12' 2") reach  
PA4330 - 4.3m (14' 1") reach

30 SERIES			
Advanced Controls	PA3430	PA3530	PA4330
Cable Control	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Motion Mini	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Motion	—	—	—
Evolution	—	—	—
Revolution Including Easy Drive System (EDS)	—	—	—
Two-way Rotor Engagement - Cable Control (CRC)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Two-way Rotor Engagement - Electric Control (ERC)*	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Mounting</b>			
Front 3-Point Mounting Including Stabiliser	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Front DIN Plate Mounting	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Rear 3-Point Mounting Including Stabiliser	<input type="checkbox"/>	—	<input type="checkbox"/>
Rear 3-Point to 4-Point Hitch Stabiliser Kit	—	—	—
Rear 3-Point to 5-Point Axle Mounting Kit**	—	—	—
Rear 5-Point Rigid Frame, Axle Mounting Kit**	—	—	—
<b>Armsets</b>			
Straight Armset	■	■	■
Midcut Armset	—	—	—
Telescopic Armset	—	—	—
Variable Forward Reach Armset (VFR)	—	—	—
Telescopic-Variable Forward Reach Armset (T-VFR)	—	—	—
Parallel Arm Geometry	■	■	■
<b>Hydraulics</b>			
Horsepower	30hp	30hp	30hp
System Type	Gear	Gear	Gear
Pump Type	Aluminum	Aluminum	Aluminum
Total Flow Rate l/min	55.0	55.0	55.0
Arm Circuit Flow Rate l/min	9.0	9.0	9.0
Attachment Circuit Flow Rate l/min	46.0	46.0	46.0
Oil Tank Capacity	80ltrs	55ltrs	80ltrs
Oil Cooler	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Totally Independent Hydraulic System	■	■	■
<b>Hydraulic Upgrades</b>			
Angle Float Kit	■	■	■
Lift Float Kit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Advanced Float Kit (only on EVOLUTION controls)	—	—	—
EDS (only on REVOLUTION controls)	—	—	—
PowerBoost (75 l/min Arm Circuit Flow Rate)	—	—	—
Additional Hydraulic Services	—	—	—
<b>Safety Equipment</b>			
External Debris Blower	—	—	—
Integrated Debris Blower	—	—	—
Road Lighting Kit	—	—	—
Warning Arrow Kit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Window Guards	■	■	■
Cab Protection Kit	—	—	—
Safety Breakaway	■	■	■
Power Slew	—	—	—
Cushioned Top Link	—	—	—
<b>Tractor Requirements</b>			
Minimum Tractor Weight	1,300kg	1,300kg	2,000kg
Minimum Tractor Horsepower	35hp	35hp	55hp
<b>Specification</b>			
Machine Weight #	400kg	400kg	523kg
Left and Right-Hand Build Options	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

\* Including SoftStart \*\* Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

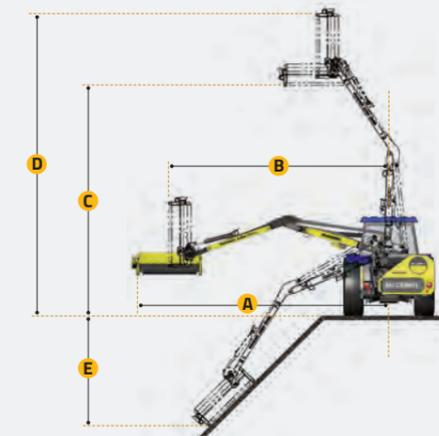

**REACH DIMENSIONS**

	PA3430	PA3530	PA4330
A	3.4m / 11' 2"	3.7m / 12' 2"	4.3m / 14' 1"
B	2.9m / 9' 6"	3.2m / 10' 6"	3.8m / 12' 6"
C	2.6m / 8' 6"	2.7m / 8' 10"	3.0m / 9' 10"
D	3.8m / 12' 6"	3.9m / 12' 10"	4.2m / 13' 9"
E	1.4m / 4' 7"	1.4m / 4' 7"	1.8m / 5' 11"

**POWER ARM FLAILHEADS**

	PA3430	PA3530	PA4330
1.00m Supercut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Supercut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Multicut Flailhead - DD	—	—	—
1.20m Multicut Flailhead - BD	—	—	—
1.20m Tuffcut Flailhead - DD	—	—	—
1.20m Twincut Flailhead - DD	—	—	—
1.20m Omega Flailhead - DD	—	—	—
1.20m Omega Flailhead - BD	—	—	—
1.50m Multicut Flailhead - DD	—	—	—
1.50m Multicut Flailhead - BD	—	—	—
1.50m Twincut Flailhead - DD	—	—	—
1.50m Omega Flailhead - DD	—	—	—
1.50m Omega Flailhead - BD	—	—	—
1.60m Multicut Flailhead - DD	—	—	—
1.60m Multicut Flailhead - BD	—	—	—
1.60m Tuffcut Flailhead - DD	—	—	—
1.60m Omega Flailhead - DD	—	—	—
1.60m Omega Flailhead - BD	—	—	—
2.00m Multicut Flailhead - DD	—	—	—
2.00m Multicut Flailhead - BD	—	—	—
<b>Flailhead options</b>			
Flailhead Skid Kit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cushioned Grass Mowing Roller	—	—	—
Hydraulic Roller	—	—	—
Hydraulic Front Hood	—	—	—

■ Standard Equipment □ Optional Equipment — Not available

Designed for the landscape, amenities and ground-care sectors, 30-series machines thrive in confined areas, parks and public grounds, and in sites with extensive street furniture.

They are also ideal for specialist contractors, local government, and small-scale farmers looking for a cost-effective hedgecutter for their own land.

- 3 Reach options from 3.4m to 4.3m
- 2 Advanced control options
- 3 Mounting options
- 1 Armset option
- 2 Floatation systems
- 10 Attachment options

