




POWER ARM
45 SERIES

PA4745 - 4.7m (15' 5") reach
PA5045 - 5.0m (16' 5") reach

45 SERIES		
Advanced Controls	PA4745	PA5045
Cable Control	<input type="checkbox"/>	<input type="checkbox"/>
Motion Mini	<input type="checkbox"/>	<input type="checkbox"/>
Motion Evolution	—	—
Revolution Including Easy Drive System (EDS)	—	—
Two-way Rotor Engagement - Cable Control (CRC)	<input type="checkbox"/>	<input type="checkbox"/>
Two-way Rotor Engagement - Electric Control (ERC)*	<input type="checkbox"/>	<input type="checkbox"/>
Mounting		
Front 3-Point Mounting Including Stabiliser	—	—
Front DIN Plate Mounting	—	—
Rear 3-Point Mounting Including Stabiliser	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Rear 3-Point to 4-Point Hitch Stabiliser Kit	—	—
Rear 3-Point to 5-Point Axle Mounting Kit**	—	—
Rear 5-Point Rigid Frame, Axle Mounting Kit**	—	—
Armsets		
Straight Armset	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Midcut Armset	<input type="checkbox"/>	—
Telescopic Armset	—	—
Variable Forward Reach Armset (VFR)	—	—
Telescopic-Variable Forward Reach Armset (T-VFR)	—	—
Parallel Arm Geometry	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Hydraulics		
Horsepower	45hp	45hp
System Type	Gear	Gear
Pump Type	Aluminium	Aluminium
Total Flow Rate l/min	90.0	90.0
Arm Circuit Flow Rate l/min	14.0	14.0
Attachment Circuit Flow Rate l/min	76.0	76.0
Oil Tank Capacity	180ltrs	180ltrs
Oil Cooler	<input type="checkbox"/>	<input type="checkbox"/>
Totally Independent Hydraulic System	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Hydraulic Upgrades		
Angle Float Kit	<input type="checkbox"/>	<input type="checkbox"/>
Lift Float Kit	<input type="checkbox"/>	<input type="checkbox"/>
Advanced Float Kit (only on EVOLUTION controls)	—	—
EDS (only on REVOLUTION controls)	—	—
PowerBoost (75 l/min Arm Circuit Flow Rate)	—	—
Additional Hydraulic Services	—	—
Safety Equipment		
External Debris Blower	<input type="checkbox"/>	<input type="checkbox"/>
Integrated Debris Blower	—	—
Road Lighting Kit	<input type="checkbox"/>	<input type="checkbox"/>
Warning Arrow Kit	<input type="checkbox"/>	<input type="checkbox"/>
Window Guards	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cab Protection Kit	—	—
Safety Breakaway	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Power Slew	—	—
Cushioned Top Link	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Tractor Requirements		
Minimum Tractor Weight	2,500kg	2,750kg
Minimum Tractor Horsepower	60hp	60hp
Specification		
Machine Weight #	641kg	665kg
Left and Right-Hand Build Options	<input type="checkbox"/>	<input type="checkbox"/>

* Including SoftStart ** Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

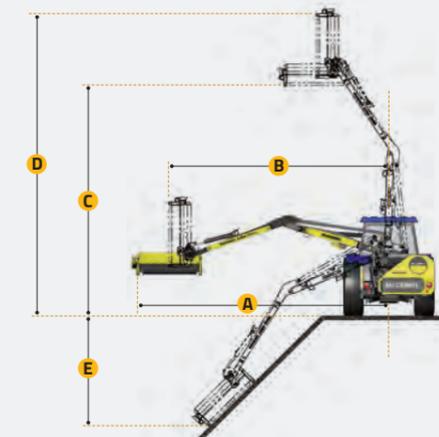

REACH DIMENSIONS

	PA4745	PA5045
A	4.7m / 15' 5"	5.0m / 16' 5"
B	4.1m / 13' 5"	4.45m / 14' 6"
C	4.0m / 13' 1"	4.3m / 14' 1"
D	5.3m / 17' 5"	5.8m / 19' 0"
E	2.0m / 6' 7"	2.2m / 7' 3"

POWER ARM FLAILHEADS

	PA4745	PA5045
1.00m Supercut Flailhead - DD	—	—
1.20m Supercut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Multicut Flailhead - DD	—	—
1.20m Multicut Flailhead - BD	—	—
1.20m Tuffcut Flailhead - DD	—	—
1.20m Twincut Flailhead - DD	—	—
1.20m Omega Flailhead - DD	—	—
1.20m Omega Flailhead - BD	—	—
1.50m Multicut Flailhead - DD	—	—
1.50m Multicut Flailhead - BD	—	—
1.50m Twincut Flailhead - DD	—	—
1.50m Omega Flailhead - DD	—	—
1.50m Omega Flailhead - BD	—	—
1.60m Multicut Flailhead - DD	—	—
1.60m Multicut Flailhead - BD	—	—
1.60m Tuffcut Flailhead - DD	—	—
1.60m Omega Flailhead - DD	—	—
1.60m Omega Flailhead - BD	—	—
2.00m Multicut Flailhead - DD	—	—
2.00m Multicut Flailhead - BD	—	—
Flailhead options		
Flailhead Skid Kit	<input type="checkbox"/>	<input type="checkbox"/>
Cushioned Grass Mowing Roller	—	—
Hydraulic Roller	—	—
Hydraulic Front Hood	—	—

■ Standard Equipment □ Optional Equipment — Not available

Designed for grounds-keepers, small-scale farmers and contractors, and local government, 45-series machines offer a competitive feature-set, solid build-quality and a host of customisation options that sets them apart from rival machines.

Weighing in at just 641kg, the PA4745 is light and manoeuvrable and its low power requirement ensures it is compatible with tractors of just 60hp and above.

- 2 Reach options from 4.7m to 5.0m
- 2 Advanced control options
- 1 Mounting option
- 2 Armset options
- 2 Floatation systems
- 10 Attachment options

