




# POWER ARM VERSISERIES

PA3430 VERSI - 3.4m (11' 2") reach  
PA4030 VERSI - 4.0m (13' 1") reach

VERSISERIES		
Advanced Controls	PA3430 VERSI	PA4030 VERSI
Cable Control	—	—
Motion Mini	—	—
Motion Evolution	■	■
Revolution Including Easy Drive System (EDS)	—	—
Two-way Rotor Engagement - Cable Control (CRC)	—	—
Two-way Rotor Engagement - Electric Control (ERC)*	■	■
<b>Mounting</b>		
Front 3-Point Mounting Including Stabiliser	■	■
Front DIN Plate Mounting	□	□
Rear 3-Point Mounting Including Stabiliser	—	—
Rear 3-Point to 4-Point Hitch Stabiliser Kit	—	—
Rear 3-Point to 5-Point Axle Mounting Kit**	—	—
Rear 5-Point Rigid Frame, Axle Mounting Kit**	—	—
<b>Armsets</b>		
Straight Armset	■	■
Midcut Armset	—	—
Telescopic Armset	—	—
Variable Forward Reach Armset (VFR)	—	—
Telescopic-Variable Forward Reach Armset (T-VFR)	—	—
Parallel Arm Geometry	—	—
<b>Hydraulics</b>		
Horsepower	30hp	30hp
System Type	—	—
Pump Type	—	—
Total Flow Rate l/min	55.0	55.0
Arm Circuit Flow Rate l/min	9.0	9.0
Attachment Circuit Flow Rate l/min	46.0	46.0
Oil Tank Capacity	—	—
Oil Cooler	—	—
Totally Independent Hydraulic System	—	—
<b>Hydraulic Upgrades</b>		
Angle Float Kit	□	□
Lift Float Kit	□	□
Advanced Float Kit (only on EVOLUTION controls)	—	—
EDS (only on REVOLUTION controls)	—	—
PowerBoost (75 l/min Arm Circuit Flow Rate)	—	—
Additional Hydraulic Services	□	□
<b>Safety Equipment</b>		
External Debris Blower	—	—
Integrated Debris Blower	—	—
Road Lighting Kit	—	—
Warning Arrow Kit	—	—
Window Guards	■	■
Cab Protection Kit	—	—
Safety Breakaway	■	■
Power Slew	■	■
Cushioned Top Link	—	—
<b>Tractor Requirements</b>		
Minimum Tractor Weight	1,750kg	2,000kg
Minimum Tractor Horsepower	35hp	55hp
<b>Specification</b>		
Machine Weight #	550kg	575kg
Left and Right-Hand Build Options	■	■

\* Including SoftStart \*\* Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

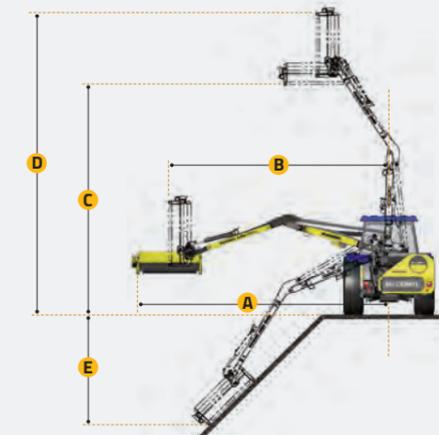

### REACH DIMENSIONS

	PA3430 VERSI	PA4030 VERSI
A	3.4m / 11' 2"	4.0m
B	3.1m / 10' 2"	TBC
C	3.0m / 9' 10"	TBC
D	3.9m / 12' 10"	TBC
E	1.1m / 3' 7"	TBC

### POWER ARM FLAILHEADS

	PA3430 VERSI	PA4030 VERSI
1.00m Supercut Flailhead - DD	□	□
1.20m Supercut Flailhead - DD	□	□
1.20m Multicut Flailhead - DD	—	—
1.20m Multicut Flailhead - BD	—	—
1.20m Tuffcut Flailhead - DD	—	—
1.20m Twincut Flailhead - DD	—	—
1.20m Omega Flailhead - DD	—	—
1.20m Omega Flailhead - BD	—	—
1.50m Multicut Flailhead - DD	—	—
1.50m Multicut Flailhead - BD	—	—
1.50m Twincut Flailhead - DD	—	—
1.50m Omega Flailhead - DD	—	—
1.50m Omega Flailhead - BD	—	—
1.60m Multicut Flailhead - DD	—	—
1.60m Multicut Flailhead - BD	—	—
1.60m Tuffcut Flailhead - DD	—	—
1.60m Omega Flailhead - DD	—	—
1.60m Omega Flailhead - BD	—	—
2.00m Multicut Flailhead - DD	—	—
2.00m Multicut Flailhead - BD	—	—
<b>Flailhead options</b>		
Flailhead Skid Kit	□	□
Cushioned Grass Mowing Roller	—	—
Hydraulic Roller	—	—
Hydraulic Front Hood	—	—

■ Standard Equipment □ Optional Equipment — Not available

Designed for specialist contractors working in the landscaping and amenities sectors, the PA3430 VERSI and PA4030 VERSI feature an innovative hydraulic side-shift that enables the operator to switch between left and right hand cutting at the touch of a button.

Front and rear mounting and a rotating flailhead, ensure these compact and manoeuvrable Power Arms offer operators the cutting flexibility to thrive in a wide variety of different work environments.

- 2 Reach options from 3.4m to 4.0m
- 2 Advanced control options
- 2 Mounting options
- Innovative armset
- 3 Floatation options
- 10 Attachment options






POWER ARM  
**VERSI SERIES**

PA5565 VERSI - 5.5m (18' 1") reach

VERSI SERIES	
Advanced Controls	PA5565 VERSI
Cable Control	—
Motion Mini	—
Motion	<input type="checkbox"/>
Evolution	<input type="checkbox"/>
Revolution Including Easy Drive System (EDS)	<input type="checkbox"/>
Two-way Rotor Engagement - Cable Control (CRC)	—
Two-way Rotor Engagement - Electric Control (ERC)*	■
<b>Mounting</b>	
Front 3-Point Mounting Including Stabiliser	—
Front DIN Plate Mounting	—
Rear 3-Point Mounting Including Stabiliser	■
Rear 3-Point to 4-Point Hitch Stabiliser Kit	—
Rear 3-Point to 5-Point Axle Mounting Kit**	<input type="checkbox"/>
Rear 5-Point Rigid Frame, Axle Mounting Kit**	—
<b>Armsets</b>	
Straight Armset	—
Midcut Armset	■
Telescopic Armset	—
Variable Forward Reach Armset (VFR)	—
Telescopic-Variable Forward Reach Armset (T-VFR)	—
Parallel Arm Geometry	■
<b>Hydraulics</b>	
Horsepower	65hp
System Type	Gear
Pump Type	Cast
Total Flow Rate l/min	—
Arm Circuit Flow Rate l/min	—
Attachment Circuit Flow Rate l/min	128.0
Oil Tank Capacity	110ltrs
Oil Cooler	■
Totally Independent Hydraulic System	■
<b>Hydraulic Upgrades</b>	
Angle Float Kit	<input type="checkbox"/>
Lift Float Kit	<input type="checkbox"/>
Advanced Float Kit (only on EVOLUTION controls)	<input type="checkbox"/>
EDS (only on REVOLUTION controls)	<input type="checkbox"/>
PowerBoost (75 l/min Arm Circuit Flow Rate)	—
Additional Hydraulic Services	<input type="checkbox"/>
<b>Safety Equipment</b>	
External Debris Blower	<input type="checkbox"/>
Integrated Debris Blower	—
Road Lighting Kit	■
Warning Arrow Kit	<input type="checkbox"/>
Window Guards	■
Cab Protection Kit	—
Safety Breakaway	■
Power Slew	■
Cushioned Top Link	■
<b>Tractor Requirements</b>	
Minimum Tractor Weight	4,500kg
Minimum Tractor Horsepower	100hp
<b>Specification</b>	
Machine Weight #	1750kg
Left and Right-Hand Build Options	■

\* Including SoftStart \*\* Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

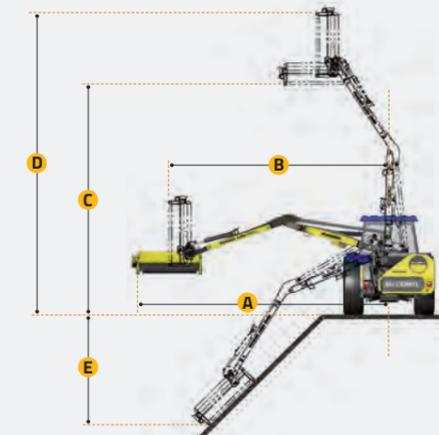

**REACH DIMENSIONS**

	PA5565 VERSI
A	5.5m / 18' 1"
B	5.0m / 16' 5"
C	5.6m / 18' 4"
D	6.8m / 22' 4"
E	4.5m / 14' 9"

**POWER ARM FLAILHEADS**

	PA5565 VERSI
1.00m Supercut Flailhead - DD	—
1.20m Supercut Flailhead - DD	—
1.20m Multicut Flailhead - DD	<input type="checkbox"/>
1.20m Multicut Flailhead - BD	<input type="checkbox"/>
1.20m Tuffcut Flailhead - DD	—
1.20m Twincut Flailhead - DD	—
1.20m Omega Flailhead - DD	<input type="checkbox"/>
1.20m Omega Flailhead - BD	<input type="checkbox"/>
1.50m Multicut Flailhead - DD	<input type="checkbox"/>
1.50m Multicut Flailhead - BD	<input type="checkbox"/>
1.50m Twincut Flailhead - DD	—
1.50m Omega Flailhead - DD	<input type="checkbox"/>
1.50m Omega Flailhead - BD	<input type="checkbox"/>
1.60m Multicut Flailhead - DD	—
1.60m Multicut Flailhead - BD	—
1.60m Tuffcut Flailhead - DD	—
1.60m Omega Flailhead - DD	—
1.60m Omega Flailhead - BD	—
2.00m Multicut Flailhead - DD	—
2.00m Multicut Flailhead - BD	—
<b>Flailhead options</b>	
Flailhead Skid Kit	<input type="checkbox"/>
Cushioned Grass Mowing Roller	<input type="checkbox"/>
Hydraulic Roller	<input type="checkbox"/>
Hydraulic Front Hood	—

■ Standard Equipment □ Optional Equipment — Not available

Designed for specialists and professional contractors, the PA5565 VERSI has been created for highway mowing because it allows operators to safely cut both the nearside verge and the central reservation while travelling in the same direction as the traffic.

Featuring an innovative swing-around armset that enables operators to switch from right to left-hand cutting at the touch of a button, the PA5565 VERSI offers a generous 5.5m reach and high-performance 65hp hydraulics making it an essential tool for carriageway vegetation maintenance.

- 5.5m reach
- 3 Advanced control options
- 2 Mounting options
- Unique armset
- 4 Floatation options
- 18 Attachment options



Innovative Swing-around action