

**McCONNEL BARRIERMOWER**




POWER ARM  
**BARRIER MOWER**

McCONNEL'S INNOVATIVE NEW  
BARRIER MOWER

BARRIER MOWER	
<b>Mounting</b>	
3-Point Linkage-Mounted (Cat II)	■
DIN Plate-Mounted	□
<b>Tractor Requirements</b>	
Minimum Tractor Weight	4500kg
Minimum Tractor Horsepower	85hp

■ Standard Equipment □ Optional Equipment

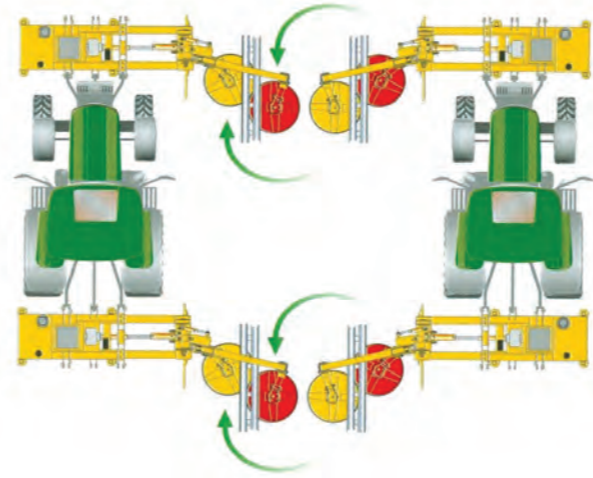

**MACHINE SPECIFICATION**

	BARRIER MOWER
Cutting Width	1.6m (5' 2")
Power Arm Horsepower	45hp
Machine Weight with Flailhead (exc. oil)*	1625kg
Oil Tank Capacity	170ltr

\* depending on machine specification, excluding attachment and oil

**McCONNEL BARRIERMOWER**

Designed for cutting around roadside obstacles and guard rails, the Barrier Mower is an ideal tool for highway verge maintenance teams, specialist contractors, and local authorities.

The Barrier Mower's multi-position alignments and mounting options combine with a high-speed blade cutting system to ensure a fast and effective performance and an attractive finish.

Created to tackle the toughest challenges of carriageway grass maintenance, the McConnel Barrier Mower is one of the most effective and versatile machines on the market.

Featuring a high-position flex-arm and twin rotary cutting heads, the machine enables operators to cut quickly and safely around obstacles and armco barriers.

- Maximum working reach of 2.3m (to the centre of the barrier)
- Three point linkage mounting
- Front and rear mounting
- 1,000 rpm PTO
- High-capacity 170-litre oil tank
- 180-degree adjustable dipper arm
- Two cutting heads
- Left and right-hand cutting



Improves Visibility



Innovative Twin Rotary Head Design

